

SLA 750 Stereolithography Additive Manufacturing Solution for the Factory Floor

From the leading innovator in stereolithography,
a 3D printing solution delivering unrivalled
accuracy, efficiency and reliability



Integrated AM Factory Ecosystem – A Full Workflow Solution


Optimized for manufacturers who want to take the next step in integrating additive manufacturing into their factory-floor ecosystems

The SLA 750 by 3D Systems answers the demand for cost effective 3D printed production parts with unprecedented levels of throughput and reliability. This combined with full factory integration software allows users to control every aspect of their additive production lines.


From the original inventors of SLA and the innovation leader in production-grade photopolymer technology, 3D Systems introduces the SLA 750.


Conceived from the ground up to deliver an industry leading combination of print size, build speeds and mechanical properties. Designed specifically to meet the needs of large-scale prototyping and production users who need large parts, high accuracy, reliability and uptime.

The SLA 750 comes with self-calibrating hardware and advanced software functionality that allows users to drastically improve workflow efficiency while delivering superior parts to their customers.

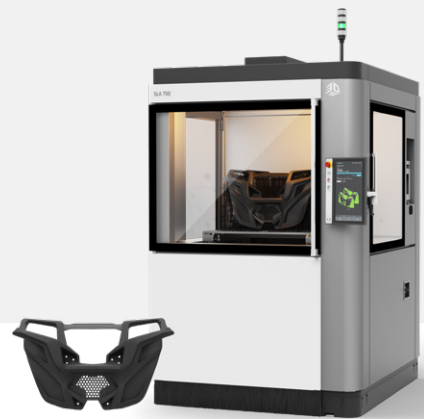

INTEGRATED FACTORY FLOOR ECOSYSTEM

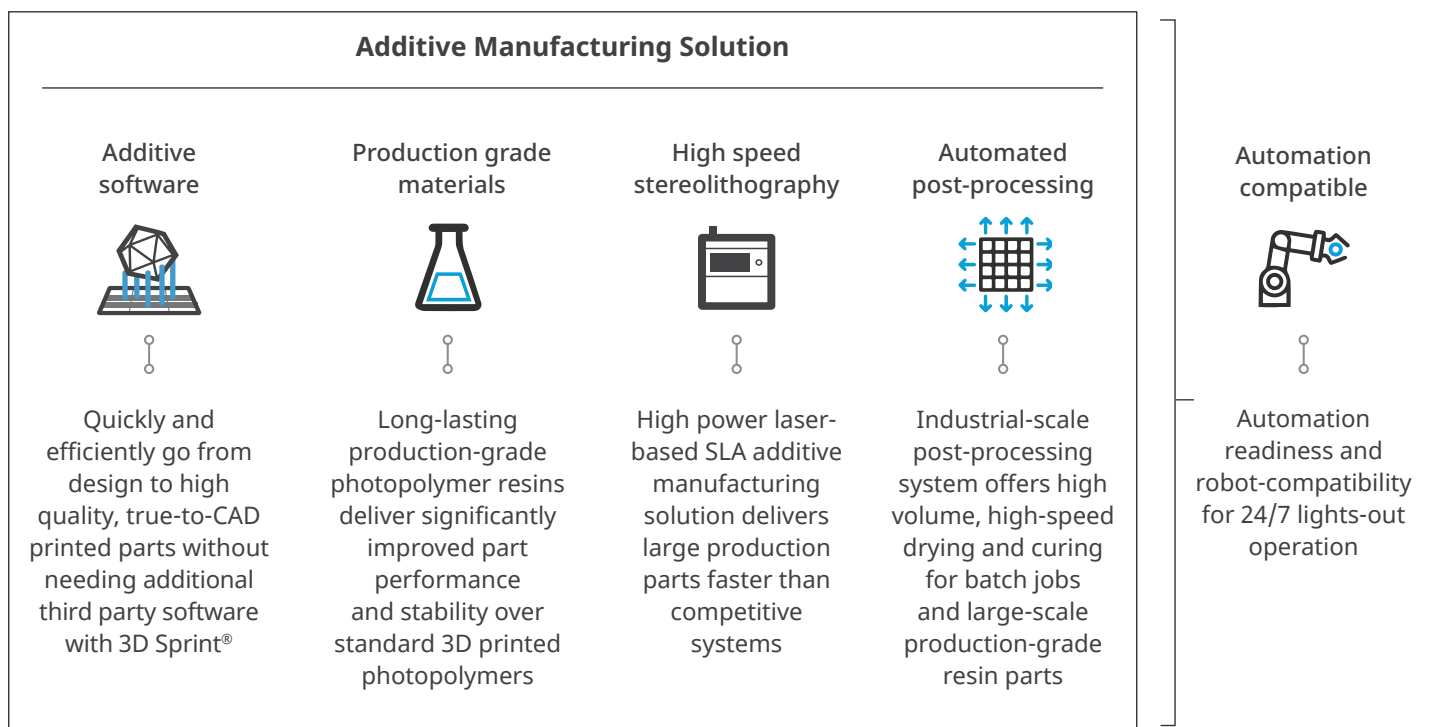

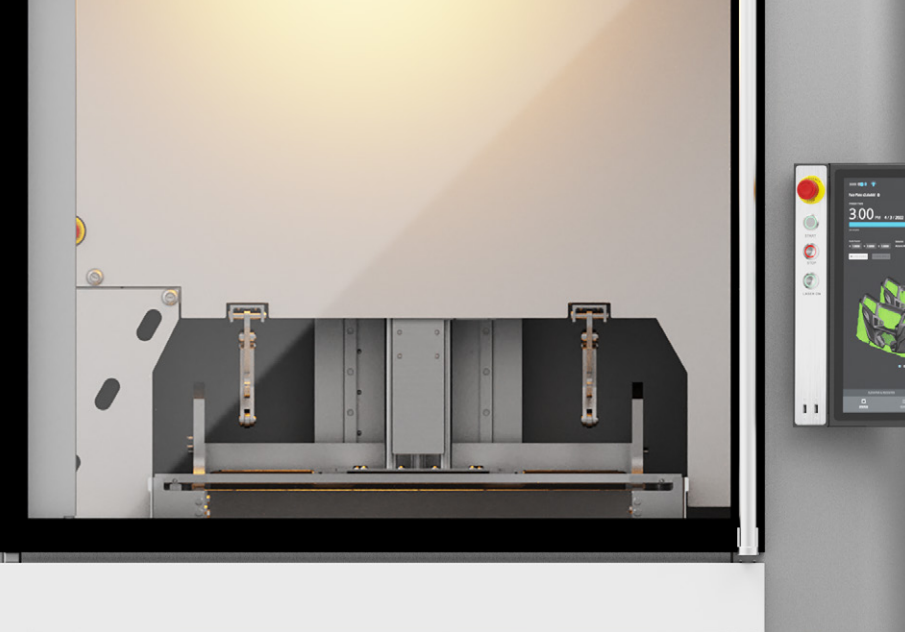

OPTIMIZED LASER SCANNING TECHNOLOGY FOR ADDITIVE MANUFACTURING

Unlike conventional SLA 3D printers that use off-the-shelf scanning technology, the SLA 750 use a proprietary scanning algorithm developed for the unique needs of production additive manufacturing. Hyper-Scan™ vector technology optimizes key speed and productivity elements to answer the needs of high demand production manufacturing environments.

COMPARABLE TO INJECTION MOLDED PARTS

The SLA 750 delivers superior surface quality and accuracy at every point across large builds.

FLEET AUTOMATION READINESS WITH 24/7 LIGHTS-OUT OPERATION

The SLA 750 come with downstream automation readiness and robot-compatibility for 24/7 lights out operation with fully automatic printer turnover, including job off-loading, washing, and onboarding.

SLA 750 SYSTEM ADVANTAGES

- High laser power (4-watt laser)
- Dynamic beam range with 2 beam sizes per print layer
- New all-metal chassis design for heavy-duty workloads, improved ergonomics and clean-ability
- Self-calibrating, dual-rail recoater
- Best-in-class production-grade resin materials
- All new UX and UI with full visibility and userfriendly experience
- Removable vat and in-vat auto material mixing
- Automation ready for factory-level ecosystem integration

SLA 750 PART ADVANTAGES

- Sharpest part corners
- Superior side wall detail
- Smallest extruded and embossed feature detail
- Thinnest features
- Smoothest layer lines on angled faces
- No 'orange peel' effect on side walls
- Highest incremental fidelity



TECHNICAL SPECIFICATIONS**SLA 750**

3D Printer Size Crated	1887 x 1887 x 2515mm (73.5 x 73.5 x 99 in)
3D Printer Size Uncrated	1370 x 1539 x 2255 mm (54 x 61 x 89 in)
3D Printer Weight Crated (not including MDM)	998 kg (2200 lbs)
3D Printer Weight Uncrated (not including MDM)	771 kg (1700 lbs)
Interchangeable Material Deliverable Modules (MDMs)	Yes
MDM Size Crated	1676 x 1194 x 1146 mm (66 x 47 x 45 in)
MDM Size Uncrated	968 x 1296 x 910 mm (31 x 51 x 36 in)
MDM Weight Crated (not including material)	227 kg (500 lbs)
MDM Weight Uncrated (not including material)	136 kg (300 lbs)
Electrical Requirements	200-240 VAC, 1- Ph, 50/60Hz, 24A
Operating Temperature Range	18°C to 28°C
Max Part Size - Full	750 x 750 x 550 mm (29.5 x 29.5 x 21.65 in)
Max Part Size - Short	750 x 750 x 50 mm (29.5 x 29.5 x 1.97 in)
Max Build Volume - Full	558 liters (147.4 U.S. gal)
Max Build Volume - Short	176 liters (46.5 U.S. gal)
Max Part Weight	86 kg (190 lbs)
Minimum Feature Size	0.2 mm (0.8 in)
Accuracy	Dimensions >34 mm (1.34 inch): ± 0.15% of feature size* Dimensions <34 mm (1.34 inch): ± 0.051 mm (0.002 inch)*
Hyper-Scan™ Vector Technology	Proprietary scan algorithm developed especially for efficient, high-quality production
Laser	4 watts, 355 nm, Solid-state frequency tripled Nd: YVO ⁴
Laser Power in Printing (watts per laser)	3
Dynamically Focusing Beam Size	125 - 1000 µm (0.005 - 0.040 in)
SLA Printer Controller Software OS	Windows 10 LTSC 1809
SLA Printer Controller Software Network Compatibility	Class A Ethernet interface, interfaces with 10/100/1000 Gigabit Ethernet network Standard USB wireless adapter compatible
Certifications	NRTL, SCC, CE, UKCA, KC & RCM
Language Support	English, German, French, Italian, Spanish, Portuguese, Japanese, Korean, Simplified Chinese
Accessories	Transfer Cart In-Vat Mixer

* Accuracy may vary depending on build parameters, part geometry and size, part orientation, and post-processing methods.

PostCure™ 1050

High Speed, High Volume Post-Processing

You can now deliver repeatable part performance, consistent part quality, and higher yield from a more automated, cost-effective, and high throughput process – both now and in the future.

INDUSTRIAL SCALE POST-PROCESSING SYSTEM FOR HIGH YIELD, REPEATABLE, AND LARGE PARTS

PostCure 1050 is an industrial-scale post-processing system offering high volume, high-speed drying and curing for batch jobs and large-scale, production-grade resin parts up to 1050 x 800 x 625 mm.

CONSISTENT CURE VOLUME. REPEATABLE PART RESULTS. MINIMAL EXPERTISE

Production-ready features including: long-life LED light sources, automatic detection and alert of light failures, and a light output calibration routine for more predictable and consistent part and job outcomes.

Consistent 360° light-uniformity, including on down-facing part surfaces, means more parts cured in less time with no need for part flipping or manual intervention.

Featuring optimized light wavelengths, a separately configurable UV intensity, and actively cooled LEDs with separately adjustable heating, you can now ensure optimal part curing without incurring unwanted thermally-induced warp in your printed parts.

BETTER PREDICT AND MANAGE YOUR CAPITAL EQUIPMENT INVESTMENT

PostCure 1050 is compatible with all 3D Systems photopolymer 3D printers and suitable for current and future 3D Systems material innovations, allowing you to eliminate additional or redundant post-processing investments.



POSTCURE™ 1050 PRODUCTIVITY ADVANTAGES

- 5 times faster production cure times vs. competing systems
- 5 times higher throughput vs. competing systems (daily cure cycles)
- Optimized and programmable pre-set cycles
- Strongest light output (25 mW/cm²)
- Built-in heating (up to 80°C)
- Built-in drying (optional)
- High powered LED light source
- No need for mid-cure part flip
- Highest batch-to-batch consistency



TECHNICAL SPECIFICATIONS

POSTCURE 1050

Max Part Extents / Chamber Size (W X D X H)	1050 x 800 x 625 mm 41 x 31 x 25 in
Optimized Consistent Curing Volume (W X D X H)	850 x 750 x 550 mm 33.5 x 30 x 22 in
Illumination Pattern	36 UV Light Modules (each containing 18 LEDs) distributed on all 6 internal surfaces for maximum uniformity. No need to flip parts
Light Output	Up to 1000 Watts total UV power evenly distributed within consistent curing volume
Light Wavelengths	350 – 450 nm range provided by 3 LED types centered around 365, 395, and 425 nm
Heat Output	Up to 3000 Watts total convective heating power fully adjustable and controlled up to 80°C for Figure 4 and AMX range of 3D Systems SLA materials
Active Cooling	Active cooling keeps sensitive parts within 5°C of ambient temperature
Part Drying	Optional part drying cycle to remove residual solvent prior to curing
Throughput	3-10X more parts cured per hour depending on application
Curing Times	Material-dependent. 15 – 120 minutes
Size Crated	1575 x 1500 x 2057 mm 62 x 59 x 81 in
Size Uncrated	1218 x 1270 x 1760 mm 48 x 50 x 69 in
Weight Crated	454 kg (1,000 lbs)
Weight Uncrated	299 kg (660 lbs)
Electrical Requirements	200-240VAC, 1- Ph, 50/60Hz, 24A
Heating Range	20-80°C
Operating Temperature Range	13-30°C
Max Part Weight	86 kg (190 lbs)
Adjustability	User-adjustable by time, temperature, and illumination intensity
Materials Compatibility	3D Systems optimized recipes for all SLA and Figure 4 materials. Compatible with most resin materials.

Production-Grade Photopolymer Resin Materials

Long-Term Mechanical Performance and Stability



3D Systems' range of production-grade stereolithography resin materials utilizes patented chemistry to deliver long-term mechanical performance and stability in UV and humid environments.

Tested for up to 8 years of indoor and 1.5 years of outdoor mechanical performance per ASTM methods, these materials deliver significantly improved longevity and stability compared to standard 3D printed photopolymers.

3D Systems SLA printed parts exhibit surface quality comparable to injection molded plastics and similar stress/strain toughness performance to standard thermoplastics. They also feature isotropic mechanical properties, enabling greater part performance at any build orientation compared to alternative additive technologies, such as filament deposition or powder binding.

Production-Grade Materials Spotlight


ACCURA® AMX
RIGID BLACK



Rigid, tough, production-grade material for high mechanical loads and structural parts. Features long-term stability of mechanical properties together with exceptional surface finish.

Ideal for industries such as automotive, consumer goods, and manufacturing services requiring large end-use parts, manufacturing aids, and functional prototypes.

Indoor Aging Stability



ACCURA® AMX
DURABLE
NATURAL



The industry's toughest production-grade SLA material, with a unique combination of impact resistance, tear-strength, and elongation at break. Ideal for mandrel tooling of composites.

Features long-term stability of mechanical properties for repeatable mechanical loads and structural parts used in motorsports, aerospace, consumer goods, and manufacturing services.

Outdoor Weathering Stability



Applications & Materials

PROTOTYPING & PRODUCTION

- Fit, form and functional prototypes
- End-use production parts
- Aesthetic concept & showroom models
- PIV wind tunnel testing models
- Automotive body exterior, paneling, under-hood, powertrain and interior cabin parts
- Air and fluid handling tubes, vents, connectors and valves
- High clarity, transparent containers, lenses and lighting covers



BIOCOMPATIBLE

- Surgical tools, guides and appliances
- Medical education and presentation models
- Biocompatible medical and dental parts
- Fluid and gas test-flow equipment



MANUFACTURING AIDS

- Lightweight investment casting patterns for large metal parts
- Mandrel tooling
- Molds and dies
- Custom assembly jigs and fixtures
- Cast urethane/vacuum
- Casting master patterns



The SLA 750 3D printer is designed to use 3D Systems' extensive portfolio of SLA materials featuring a wide range of properties such as rigid, tough, high temperature, and clear, as well as specially formulated materials for biocompatible medical applications and sacrificial investment casting patterns.



RIGID

Similar aesthetics and properties to injectionmolded ABS.



TOUGH & DURABLE

Look and feel of polypropylene.



CLEAR

Including the industry's highest clarity material for polycarbonate-like parts.



CASTABLE

Expendable resins specifically formulated for QuickCast® sacrificial patterns for investment casting.



HIGH TEMPERATURE

Heat deflection temperatures up to over 215°C (419°F) offering exceptional performance under extreme conditions.



SPECIALTY MATERIALS

Including options for jewelry-specific casting and dental models' production.

All-In-One Software for Plastic Printing

*An all-in-one software to prepare,
optimize and print 3D CAD data.*

3D Sprint delivers all the tools you need to quickly and efficiently go from design to high quality, true-to-CAD printed parts without needing additional third party software.

Designed especially for the needs of SLA power-users, 3D Sprint facilitates file preparation with native CAD import and advanced mesh repair tools, increases productivity with auto placement, enhances manufacturing efficiency with finely tuned supports, and reduces the need for additional software.

Sp 3D Sprint

PRINT TRUE-TO-CAD PARTS


Smart geometry processing and powerful slicing technology eliminate geometry processing artifacts.

STREAMLINE TIME TO FINISHED PARTS

An extensive automated toolset facilitates the entire 3D printing process, saving material and post-processing time without compromising on part quality.

INCREASE PRODUCTIVITY WITH OPTIMIZED DATA MANAGEMENT

Accurately estimate print time and optimize material levels and usage both before and during the print operation.

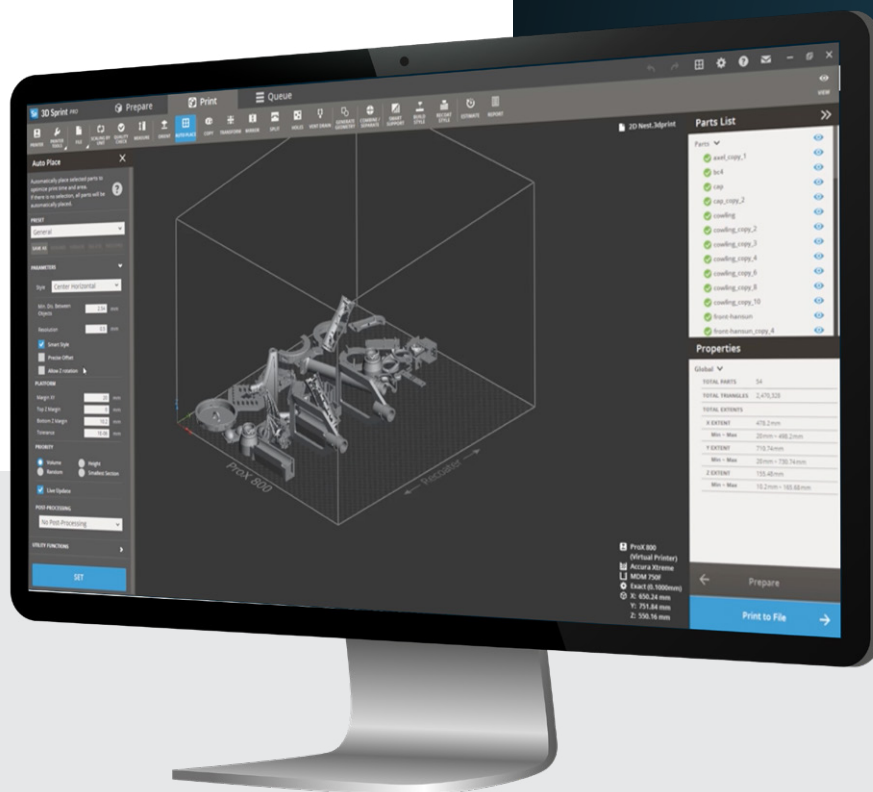

Advance Production Efficiency with 3D Systems' Additive Manufacturing Solutions

3D Systems delivers a breakthrough in additive manufacturing productivity, speed, reliability, and automation for SLA 3D printing. A full solution comprised of the SLA 750 and SLA 825 Dual family of large-format 3D printing systems, advanced production-grade photopolymer materials, the PostCure 1050 post-processing system, and the Oqton cloud-based, end-to-end manufacturing operating system.



[CONTACT US](#)

Note: Not all products and materials are available in all countries – please consult your local sales representative for availability.

Warranty/Disclaimer: The performance characteristics of these products may vary according to product application, operating conditions, material combined with, or with end use. 3D Systems makes no warranties of any type, express or implied, including, but not limited to, the warranties of merchantability or fitness for a particular use. Printer specifications are based upon the use of 3D Systems authorized materials. Printer warranty and support may be limited if unauthorized materials are used on the printer.

© 2026 by 3D Systems, Inc. All rights reserved. Specifications subject to change without notice. 3D Systems, the 3D Systems logo, ProJet, Visijet and 3D Sprint are registered trademarks of 3D Systems, Inc.